




## Features

- 300 watts peak pulse power ( $t_p = 8/20\mu s$ )
- Protects one bidirectional line or two unidirectional lines
- Working Voltages: 24V
- Low clamping voltages

## IEC Compatibility (EN61000-4)

- IEC 61000-4-2 (ESD)  $\pm 30kV$  (air),  $\pm 30kV$  (contact)
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 5A (8/20 $\mu s$ )

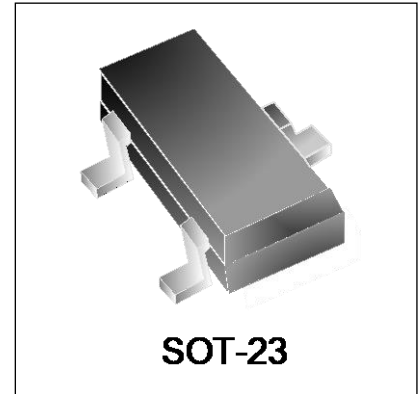


## Mechanical Characteristics

- JEDEC SOT23 package
- Molding compound flammability rating: UL 94V-0
- Marking: Marking Code
- Packaging: Tape and Reel per EIA 481
- RoHS Compliant


## Applications

- RS-232, RS-422 & RS-485
- Cellular Handsets and Accessories
- Control & Monitoring Systems
- Portable Electronics
- Set-Top Box
- Servers, Notebook, and Desktop PC
- Wireless Bus Protection

## Circuit Diagram

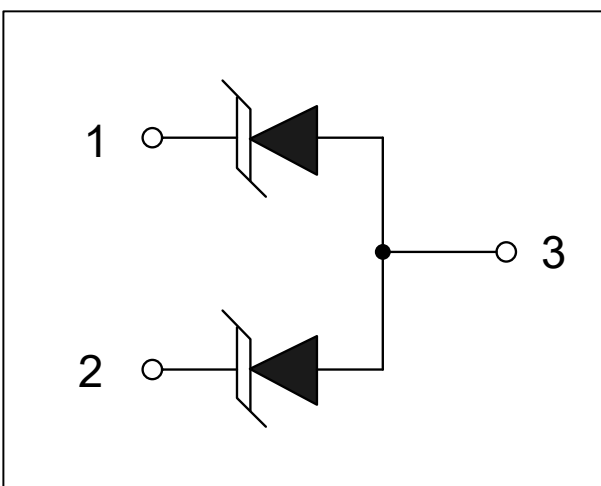


## Schematic & PIN Configuration

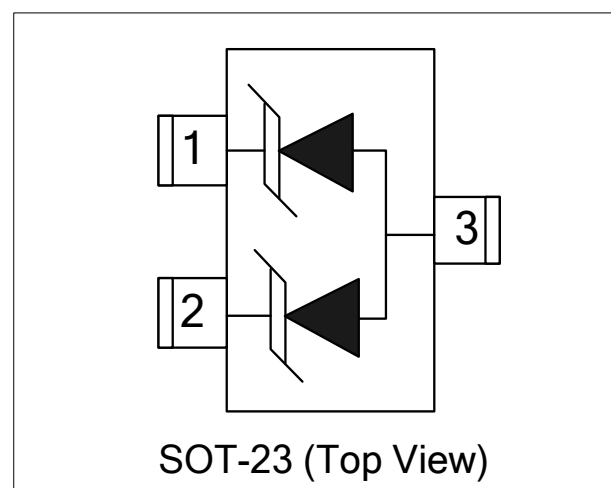

| Absolute Maximum Rating                |           |              |             |
|--|-----------|--------------|-------------|
| Rating                                 | Symbol    | Value        | Units       |
| Peak Pulse Power ( $t_p=8/20\mu s$ )   | $P_{PP}$  | 300          | W           |
| Peak Pulse Current ( $t_p=8/20\mu s$ ) | $I_{PP}$  | 5            | A           |
| Lead Soldering Temperature             | $T_L$     | 260(10sec)   | $^{\circ}C$ |
| Operating Temperature                  | $T_J$     | -55 to + 125 | $^{\circ}C$ |
| Storage Temperature                    | $T_{STG}$ | -55 to +150  | $^{\circ}C$ |

### Electrical Parameters (T=25 $^{\circ}C$ )

| Symbol    | Parameter                           |
|-----------|-------------------------------------|
| $I_{PP}$  | Reverse Peak Pulse Current          |
| $V_C$     | Clamping Voltage @ $I_{PP}$         |
| $V_{RWM}$ | Working Peak Reverse Voltage        |
| $I_R$     | Reverse Leakage Current @ $V_{RWM}$ |
| $V_{BR}$  | Breakdown Voltage @ $I_T$           |
| $I_T$     | Test Current                        |
| $I_F$     | Forward Current                     |
| $V_F$     | Forward Voltage @ $I_F$             |

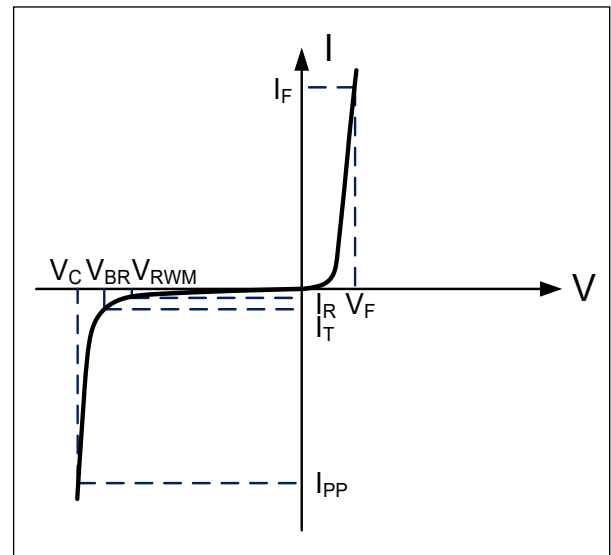


### Electrical Characteristics

| DW24M2T-S                 |           |   |         |         |         |         |
|---------------------------|-----------|---|---------|---------|---------|---------|
| Parameter                 | Symbol    | Conditions  | Minimum | Typical | Maximum | Units   |
| Reverse Stand-Off Voltage | $V_{RWM}$ |   |         |         | 24      | V       |
| Reverse Breakdown Voltage | $V_{BR}$  | $I_T=1mA$   | 26.7    |         |         | V       |
| Reverse Leakage Current   | $I_R$     | $V_{RWM}=24V, T=25^{\circ}C$                      |         |         | 1       | $\mu A$ |
| Clamping Voltage          | $V_C$     | $I_{PP}=1A, t_p=8/20\mu s$                        |         |         | 40      | V       |
| Maximum Clamping Voltage  | $V_C$     | $I_{PP}=5A, t_p=8/20\mu s$                        |         | 50      | 55      | V       |
| Junction Capacitance      | $C_j$     | Pin 1 to 2<br>$V_R = 0V, f = 1MHz$                |         | 16      |         | pF      |
| Junction Capacitance      | $C_j$     | Pin 1 to 3 and Pin 2 to 3<br>$V_R = 0V, f = 1MHz$ |         | 30      |         | pF      |




## Typical Characteristics


Peak Pulse Power vs. Pulse Time

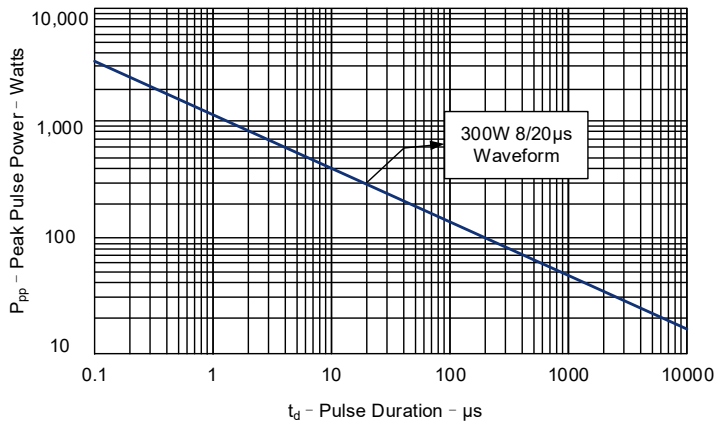


Power Derating Curve

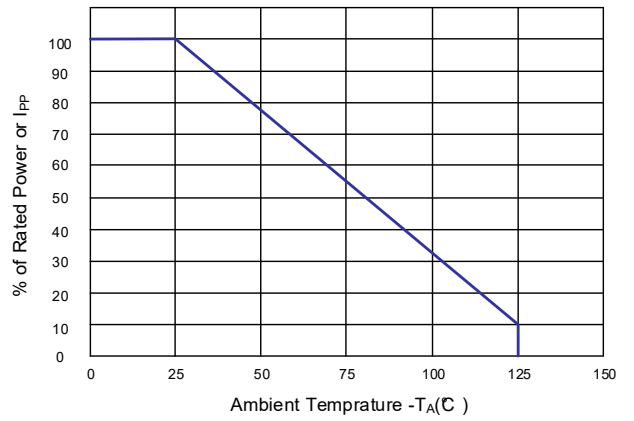


8/20μs Pulse Waveform

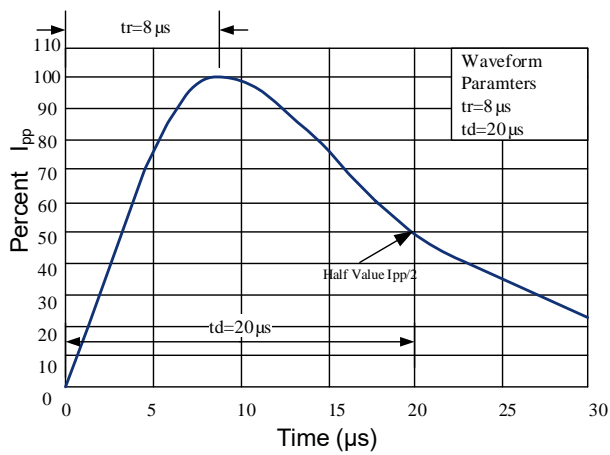

ESD Pulse Waveform (Per IEC 61000-4-2)

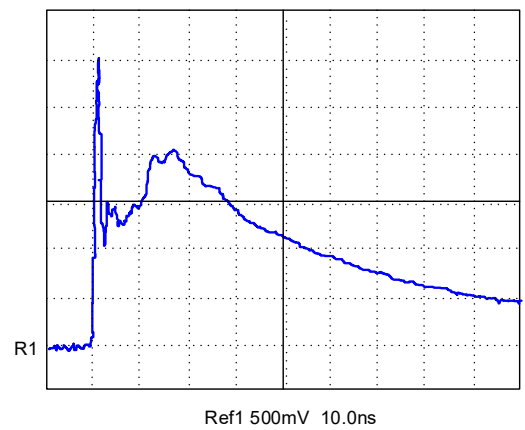

## Outline Drawing – SOT-23

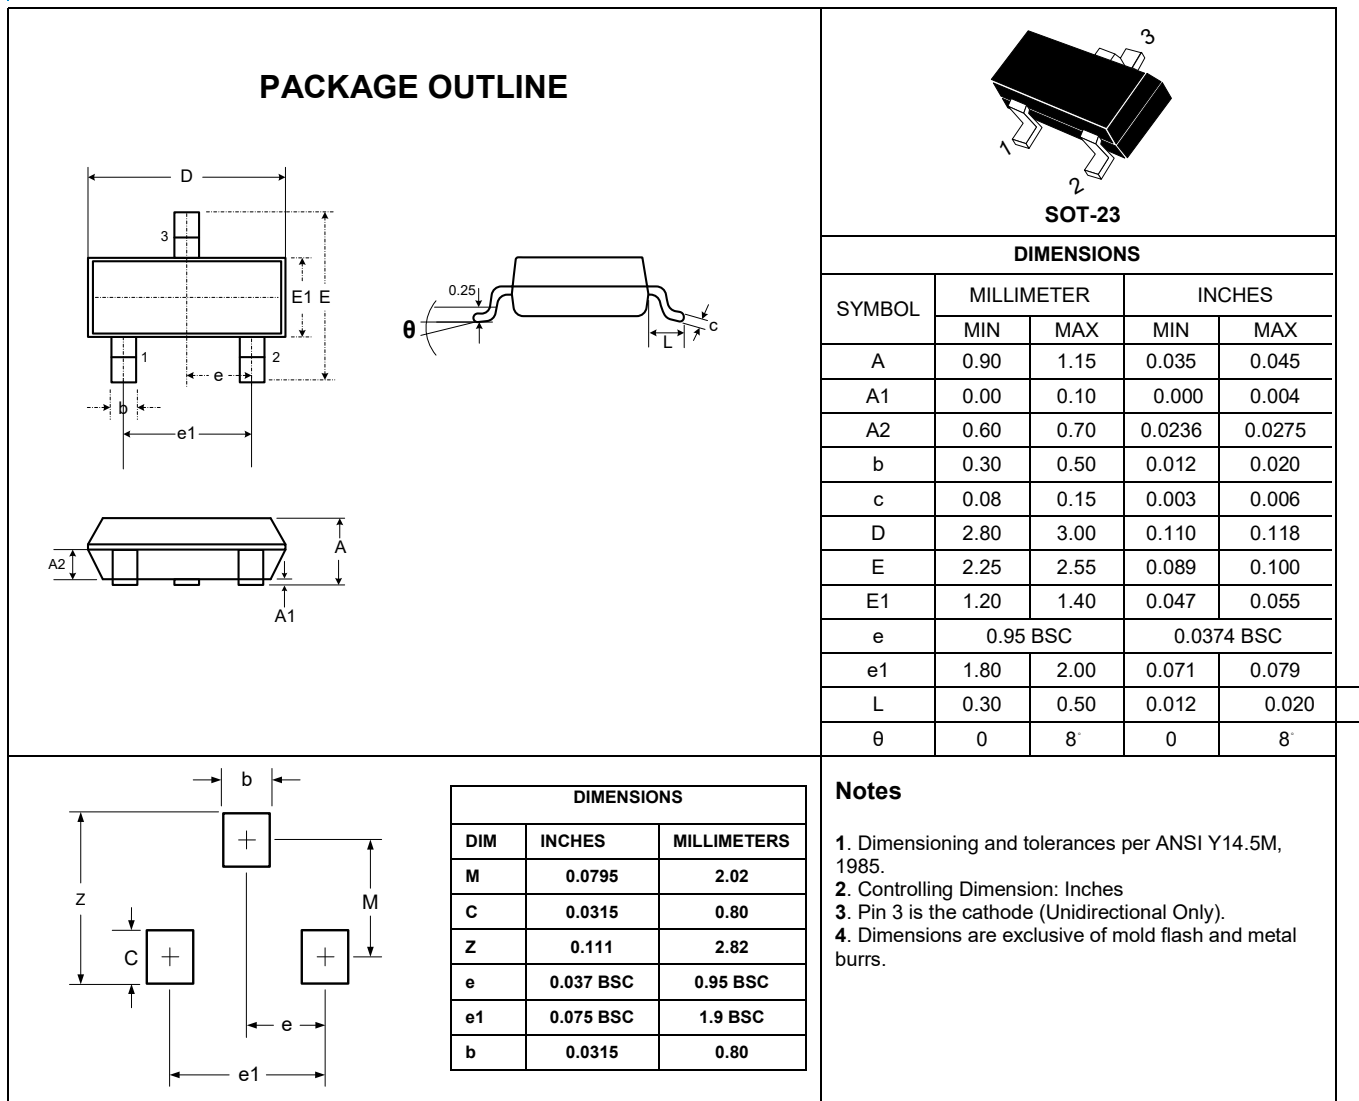

## Marking Codes

|              |           |
|--------------|-----------|
| Part Number  | DW24M2T-S |
| Marking Code | CM2       |

## Package Information

Qty: 3k/Reel